

THE MOST AGGRESSIVE REPAIR TAPE.



Seals Around Ductwork & Other Roof Penetrations



Reduce Travel Downtime with Quick, On-the-Go RV Repairs



Super Versatile with Countless Flat Roof Repair Applications

UNI



UNISEAL
Roof Repair
TAPE

Waterproof
All Weather Application
Stable from -70 to 200°F
Great for RV Repair

4in. x 25ft. Aluminum

MADE IN THE USA | www.UnitedAsphalt.com

Can be used on virtually all roofing materials including EPDM, TPO, Aged PVC, Metal, Cement, Plywood and OSB.

Directions: clean surface, wipe dry, apply 20-170 for installation below 32° a primer is recommended.
8 50720 00600 7

1.800.843.0317
www.UnitedAsphalt.com/UniSeal

Manufactured by:
United Asphalt Company
P.O. Box 291, Cedar Brook, NJ 08018



GREAT FOR QUICK, RV'S, HVAC SYSTEMS + MORE

UniSeal Roof Repair Tape is the most aggressive sealing tape available in the industry. Our adhesive technology allows our tape to bond to virtually all roofing materials making repairs fast and permanent. UniSeal Tape is VOC-Free, stable from -70°F to 200°F and can be applied in All Weather applications!

UniSeal Roof Repair Tape can be used to make repairs to TPO, EPDM, metal, PVC, modified & cement. Its flexibility allows the tape to conform to shape, making it a great reinforcement around curbs, vents, chimneys, AC systems, piping and any roof-penetrating devices.



APPLICATION INSTRUCTIONS



1

Ensure area to be repaired is clean and dry.



2

Press into place by hand.




3

Force UniSeal Repair Tape into any surface irregularities.

PRODUCT INFORMATION

Available Sizes

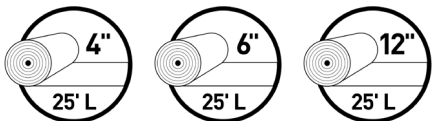

Available Colors



Packaging

- ▶ 4" x 25" Black, White & Aluminum
12 Rolls Per Case
- ▶ 6" x 25" Black, White & Aluminum
8 Rolls Per Case

TECHNICAL DATA

Property	Test Method	Typical Value
Thickness w/o liner	ASTM 01777	26 Mils
Tensile Strength	ASTM 0882	15 lbf/in
Elongation	ASTM 0882	> 700%
Adhesion	PSTC-1	20 lbf/in
▶ 25°F Peel Adhesion	ASTM 06862	13 lbf/in
▶ 150°F Peel Adhesion	ASTM 06862	2.2 lbf/in
WVTR @ 73°F / 50% rh	ASTM E96-B	<0.02 g/100in ² /24hrs
Permeance @ 73°F / 50% rh	ASTM E96-B	<0.05 perms
Low Temperature Flexibility	ASTM 01970	Excellent
Application Temperature		20°F to 170°F
▶ w/Recommended Primer		-25°F to 25°F
Service Temperature		-70°F to 200°F
Shelf Life		5 years

1.800.843.0317
www.UnitedAsphalt.com/UniSeal

Manufactured by:
United Asphalt Company
P.O. Box 291, Cedar Brook, NJ 08018